


Citizen 8200,8210,8260 Movement Parts (1)

Compiled by EmmyWatch - https://www.emmywatch.com


Catalog No. 82-1~82-2

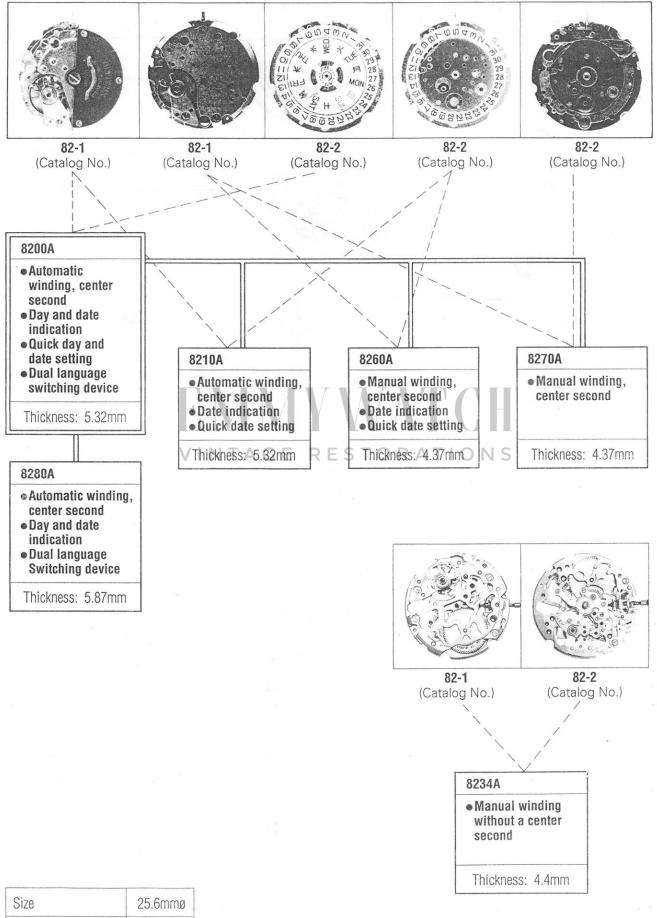


0120	20.00000					
Beats	21,600					

82

Catalog No. 82-1

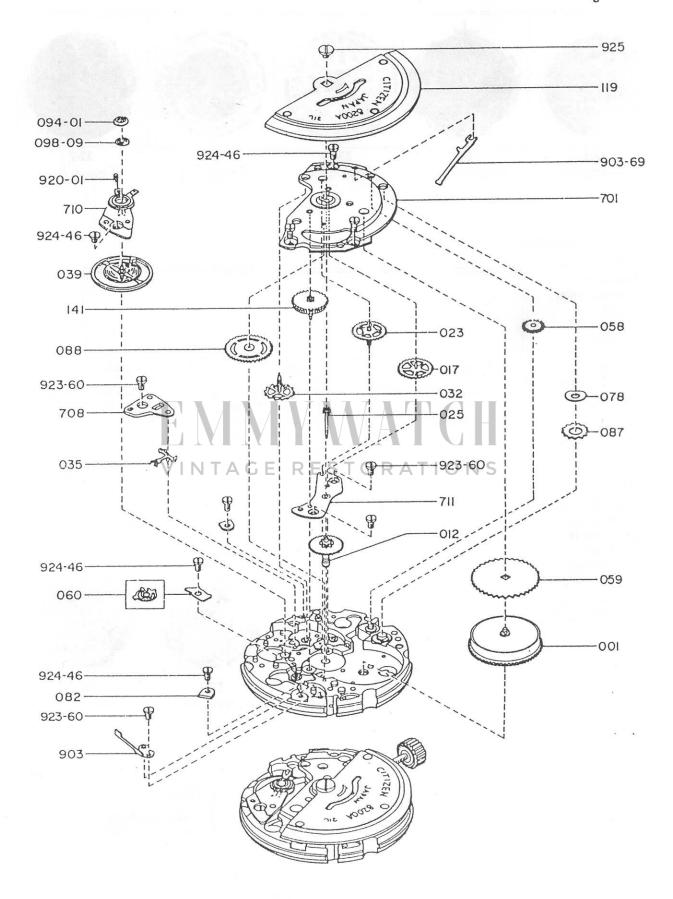

1. Even if a part on hand is different in shape from the one shown in the development, their part No. are the same as long as the purpose of the use of them are the same.

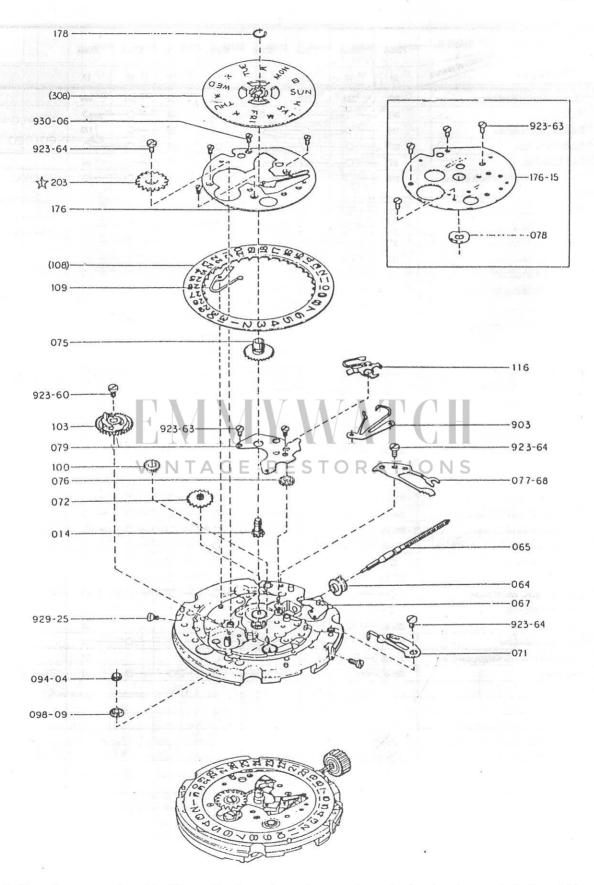

- 1. Even if a part on hand is different in shape from the one shown in the development, their part No. are the same as long as the purpose of the use of them are the same.
- Note: Some of the day dial driving wheels (203-12) are equipped with the day dial driving wheel setting screws (923-64).

Catalog No. 82-1

Part No.	Caliber No.	8200A	8200A	8210A	8210A	8234A	8260A	8270A	8280A	
	Nos. of jewels	21	17	21	17	17	17	17	17	
701	Barrel and train wheel bridge	263	264	263	264	566	265	266	264	
708	Pallet cock	066 -		0		076	066 -			
710	Balance cock complete	159 -	0	0	0	179	159 -	0	173	
711	Center whell cock	074 -	0	0		127	074 -		0	
001	Barrel complete	87 -	0			97	88 -	0	96	
012	Center wheel and pinion with cannon pinion	116 -	-0-	0	-0	156	116 -	0	0	
017	Third wheel and pinion	76 -	0	0		0				
023	Fourth wheel and pinion	94 -								
025	Sweep second pinion	67 -		0	0		67 -		0	
032	Escape wheel and pinion	106 -		0		0			0	
035	Jeweled pallet fork and staff	56 -		0		0			0	
039		102 -	0	0	-0-	0			0	
058	Balance with hairspring regulated	36 -		0		0			0	
058	Ratchet wheel									
		56 -	0	-0-	0	69	56 -			
060	Click	39 -		-0	O	40 -			39	
082	Casing clamp	06 -	-0-	0-	0				O	
087	Intermediate wheel	25 -	0	0	0-				0	
088	Reduction wheel and pinion	12 -	0	<u> </u>	0				12	
119	Oscillating weight, complete	147	148	149	151				183	
141	Pawl winding wheel	19 -	-0		0			-	19	
078	Intermediate wheel washer	15 -	0	0	0	0	- Q		O	
903-69	Friction spring for sweep scond pinion	903-69 -	-0	0	-0	1	903-69 -		0	
903-70	Click spring VIN	903-70 -	60	R 6.8	- To O	RA	10	NS	70	
	(PS) Upper end-piece	091-38 -	0			-0-				
	(PS) Upper cap jewel, mounted	094-01 -	0	0-	0	-0-			0	
	(PS) Spiral spring with jewel	098-09 -	0		0-	0				
	(Screw for barrel and train wheel bridge	924-46	0-		0-			0	61	
	Balance cock screw	6							6	
	Pallet cock screw	923-60 -	0	0				0	11	
	Screw for center wheel cock	<u> </u>							8	
	Screw for click spring	L	L						J	
	Click screw	024.46	0	0			5-1-1		61	
	Hairspring stud screw	924-46 -	0						0	
		920-01 -		0	0	-0-				
	Screw for oscillating weight, complete	925-49 - 924-46 -	 	-0-	O	0		0	52 · 61	
		324-40							01	
			<u></u>				-			
			1							

Catalog No. 82-2

Part No.	Caliber No.	8200A	8200A	8210A	8210A	8234A	8260A	8270A	8280A	
an ivo.	Nos. of jewels	21	17	21	17	17	17	17	17	
014	Cannon pinion	108 -	0		0	126	108 -		0	
064	Clutch wheel	45 -	0				-0-	0	57	
065	Winding stem	212 -	-0-							
067	Setting lever	86 -					86 -			
071	Yoke	51 -	-0-			73	51 -			
072	Minute wheel and pinion	52 -	-0-							
075	Hour wheel	124 -				213	124 -			
076	Setting wheel	43 -								
077	Sotting lever spring	68 -				102	69 -			
078	Diai washer			14 -				0		
079	Minute wheel guard	60 -				84	60 -			
100	Intermediate date wheel	17 -				04	17	0	19	
							65		65	
103	Date dial driving wheel	65 -		-0-					35	
109	Date jumper	35 -					35		30	
116	Date corrector	29 -	-0	30 -			30			
176	Date dial guard	14 -		15 -	0		15			
176	Hour wheel guard					89		15	14	
178	Day dial gib	03 -	0						11	
203	Day dial driving wheel	12 -	0						12	
903	Date corrector spring	71 -		0	0		71	1		
176	Hour wheel guard								3	
	(PS) Lower end-pieco	091-40	0	0	0	-0			0	
	(PS) Lower cap jewel mounted	094-01			0		O	0	0	
	(PS) Spiral spring with jewel	098-09	Go		5-6-0	RoA	<u>T-þO</u>	Nos		
	Screw for yoke	923-64	<u> </u>							
	Screw for minute wheel guard	923-63			-0		0	0		
	Screw for setting lever spring	923-64				-0-	0			
	Screw for date dial driving wheel	923-60		-0-	0		923-60		923-11	
	Screw for date dial guard	930-06	0	923-63	0		923-63		930-06	
	Screw for day dial driving wheel	923-64	0						923-64	
	Screw for dial	929-25	+							
	Screw for hour wheel guard					923-63		923-63		
										-
		1								