




# EMMYWATCH

VINTAGE RESTORATIONS

## Seiko 5626B Movement Parts (1)


*Compiled by EmmyWatch - <https://www.emmywatch.com>*




Cal. 5626B

### Characteristics

Casing diameter: 25.60  $\phi$  mm  
 Maximum height: 4.50 mm  
 Vibrations per hour: 28,800  
 Automatic and auxiliary hand winding with sweep second  
 Calendar (day & date)  
 Instant setting device for day & date calendar  
 Bilingual change-over system for day of week  
 Second-setting device  
 Micro-adjustor  
 "Diashock" Shock Resistant Device  
 "Diafix" Oil Lubrication Device




112 561




161 561




171 562



251 561




285 561




301 561




310 561



341 564




344 562




391 561



401 565



509 573



☆ 870 563

Calibre No.	<b>5626B</b>	Jewels	<b>25j</b>	Style Name
⇨ Basic Calibre <b>5606A</b> <sup>23J</sup> / <sub>25J</sub> Catalog No. 56-06-1				
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS	
<p><b>112 561</b> Barrel &amp; train-wheel bridge (with crown wheel)  <b>161 561</b> Pallet cock  <b>171 562</b> Balance cock (with micro-adjustor pin)                      189 560 Transmission wheel bridge                      205 560 Complete barrel with arbor                      213 560 Barrel arbor                      220 560 Large driving wheel &amp; pinions                      225 560 Cannon pinion                      231 560 Third wheel &amp; pinion                      241 560 Sweep second wheel &amp; pinion  <b>251 561</b> Escape wheel &amp; pinion                      261 560 Minute wheel                      271 611 Hour wheel                      282 560 Clutch wheel                      283 560 Winding pinion  <b>285 561</b> Ratchet wheel  <b>301 561</b> Jewelled pallet fork &amp; staff  <b>310 561</b> Balance complete with stud                      315 560 Balance staff                      331 560 Roller with jewel  <b>341 564</b> Regulator  <b>344 562</b> Regulator adjusting device                      345 612 Stud holder                      354 560 Winding stem                      361 560 Second-setting lever spring                      367 560 Minute wheel spring                      381 560 Click                      ☆ 383 560 }                      ☆ 383 561 } Setting lever                      ☆ 383 562 }                      384 560 Yoke (Clutch lever)                      385 560 Yoke spring (Clutch lever spring)                      387 560 Minute wheel bridge                      388 560 Setting lever spring                      390 560 Setting lever axle  <b>391 561</b> Second-setting lever  <b>401 565</b> Mainspring with slipping attachment                      505 560 Transmission wheel  <b>509 573</b> Oscillating weight with ball-bearing                      531 560 Differential wheel                      ☆ 801 560 Date dial                      802 560 Date driving wheel                      803 560 Setting wheel lever complete                      808 560 Date dial guard                      810 560 Date jumper                      812 560 Setting wheel lever spring                      817 610 Intermediate date wheel                      848 560 First reverser idler                      851 560 Second reverser idler                      854 560 Reverser idler bolt                      868 560 Day finger                      ☆ 870 563 Day star with dial disk (English ↔ Japanese)                      873 560 Day jumper                      ☆ 884 560 Holding ring for dial                      963 610 Snap for day star with dial disk                      981 560 Day-date corrector wheel rocker                      986 560 Day-date corrector wheel rocking lever                      987 560 Day-date corrector wheel rocking lever spring                      989 560 Intermediate wheel for day correction</p>	<p>011 123 Upper hole jewel for barrel                      011 133 Lower hole jewel for differential wheel                      011 142 Lower hole jewel for barrel                      011 147 Upper hole jewel for large driving wheel &amp; pinions                      011 147 Lower hole jewel for large driving wheel &amp; pinions                      011 147 Lower hole jewel for 1st reverser idler                      011 151 Upper hole jewel for differential wheel                      011 159 Upper hole jewel for transmission wheel                      011 159 Lower hole jewel for transmission wheel                      011 323 Lower hole jewel for 3rd wheel                      011 423 Lower hole jewel for escape wheel                      011 503 Upper hole jewel for pallet                      011 503 Lower hole jewel for pallet                      014 363 Diashock upper frame                      014 384 Diashock lower frame                      014 365 Diashock hole jewel with frame                      011 210 Diashock cap jewel                      014 317 Diashock spring                      015 421 Diafix upper hole jewel with frame for 3rd wheel                      015 411 Diafix upper hole jewel with frame for escape wheel                      011 206 Diafix cap jewel                      015 113 Diafix spring                      022 150 Stud screw                      022 252 Transmission wheel bridge screw                      022 257 Screw for day-date corrector wheel rocking lever spring                      022 373 Pallet cock screw                      022 454 Screw for reverser idler bolt                      022 458 Screw for oscillating weight                      022 467 Ratchet wheel screw                      022 482 Screw for intermediate wheel of day correction                      022 484 Bridge screw                      022 486 Minute wheel bridge screw                      022 662 Setting lever spring screw                      022 667 Second-setting lever screw                      022 673 Screw for day &amp; date driving wheel                      022 674 Screw for day-date corrector wheel rocking lever                      022 753 Date dial guard screw                      022 753 Day jumper screw                      022 761 Dial screw                      023 179 Tube for minute wheel bridge screw                      023 180 Tube for bridge screw (Cylinder type)                      023 184 Tube for bridge screw (Recessed type)</p>			

Catalog No.

☆⇨ Please see remarks on the next page.  
 As for all other parts not shown here, please refer to the basic calibre (Cal. No. **5606A** <sup>23J</sup>/<sub>25J</sub> Catalog No. 56-06-1 Green page).

☆⇨ Please see remarks on the next page.  
 Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre (Cal. No. **5606A** <sup>23J</sup>/<sub>25J</sub> Catalog No. 56-06-1 Green page).

Calibre No.	<b>5626B</b>	Jewels	<b>25j</b>	Style Name
Basic Calibre 5606A <sup>23J</sup> / <sub>25J</sub> Catalog No. 56-06-1				

**Remarks :**

**Setting lever**



There are three types of setting levers, used according to the dial diameter. Select the suitable setting lever by referring to the shapes indicated in fig. 1.

When a setting lever unsuitable for the dial diameter is used, the winding stem cannot be pulled out or the movement cannot be assembled in the case. Pay attention to this point (refer to fig. 2).

When the dial is round, the number of the setting lever differs (listed below) according to the dial diameter.

- (Dial diameter) 25.5~26.5 φmm ..... ☆383 561
- ( " ) 27.5~28.5 φmm ..... ☆383 560
- ( " ) 29.5~30.5 φmm ..... ☆383 562

If the number of the setting lever is unknown or when placing an order for a setting lever other those mentioned above, specify ① Cal. No. and ② the dial No.

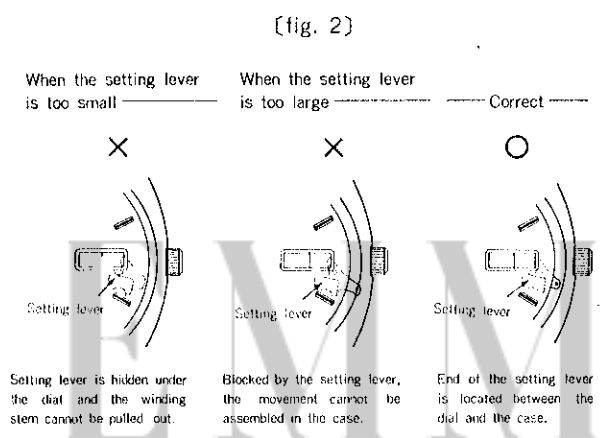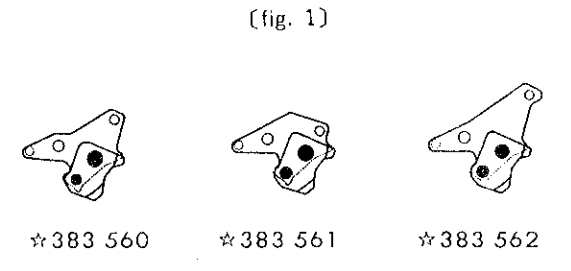

**Date dial**

☆801 560.....Used when both the crown and the date frame are located at **3** o'clock.

If the date dial is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.

**Day star with dial disk**

☆870 563 (English ↔Japanese).....Used when both the crown and the day frame are located at **3** o'clock.

When ordering any other type of the day star with dial disks, clearly mention the number printed on the disk. If the number is unknown, specify ① Cal. No. ② the crown position ③ the day frame position ④ the dial No. and ⑤ the national language.

**Holding ring for dial** ----- Measure the total thickness and the outside diameter -----

☆884 560 ..... 0.53 mm total thickness and 27.0 φmm outside diameter.

If the holding ring for dial is required in any other type, specify ① Cal. No. and ② the dial No.

VINTAGE WATCH RESTORATIONS