



EMMYWATCH
VINTAGE RESTORATIONS

Seiko 6105A Movement Parts (1)

Compiled by EmmyWatch - <https://www.emmywatch.com>

SEIKO

No. **6105A**


Jewels
17j

Style Name


Calibre 6106A 25J Catalog No. 61-06-1

Characteristics

Casing diameter: 27.00 ϕ mm
 Maximum height: 5.15 mm
 Vibrations per hour: 21,600
 Automatic winding with sweep second
 Calendar (date)
 Instant date setting (rotating crown)
 "Diashock" Shock Resistant Device

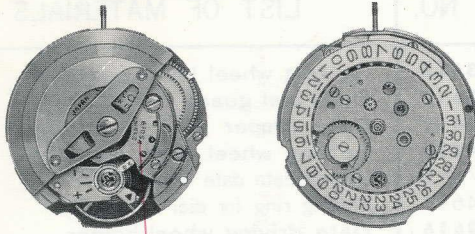


Cal. 6105A



112619



122612



171619



231614



282619



345612



383615



384615




385615



387615



388615



193619



500620

823619



802616



803615



808619



810619



814615



990616



022269



022458

$\frac{2}{1}$

01188

Calibre No.	6105A	Jewels	Style Name
⇒ Basic Calibre 6106A 25J Catalog No. 61-06-1		17j	

PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
112619	Barrel & train-wheel bridge	803615	Setting wheel lever complete
122612	Center wheel bridge	808619	Date dial guard
161805	Pallet cock	810619	Date jumper
171619	Balance cock	814615	Setting wheel lever plate
193619	Framework for automatic device with ball-bearing	817610	Intermediate date wheel
205613	Complete barrel with arbor	☆ 884611	Holding ring for dial
213612	Barrel arbor	990616	Date driving wheel holder
224611	Center wheel & pinion with cannon pinion	022150	Stud screw
225611	Cannon pinion	022252	Holder screw for transmission wheel & pawl lever
231614	Third wheel & pinion	022269	Minute wheel bridge screw
241611	Sweep second wheel & pinion	022351	Center wheel bridge screw
251611	Escape wheel & pinion	022458	Screw for oscillating weight
261611	Minute wheel	022467	Ratchet wheel screw
271611	Hour wheel	022468	Pallet cock screw
282619	Clutch wheel	022469	Bridge screw
285611	Ratchet wheel	022470	Framework screw for automatic device with ball-bearing
301611	Jewelled pallet fork & staff	022471	Click screw
310611	Balance complete with stud	022662	Setting lever spring screw
315611	Balance staff	022758	Dial screw
331610	Roller with jewel	022760	Date dial guard screw
341611	Regulator	022760	Setting wheel lever plate screw
345612	Stud holder	011145	Upper hole jewel for center wheel
354615	Winding stem	011146	Lower hole jewel for center wheel
381611	Click	011306	Lower hole jewel for 3rd wheel
383615	Setting lever with axle	011406	Upper hole jewel for escape wheel
384615	Yoke (Clutch lever)	011406	Lower hole jewel for escape wheel
385615	Yoke spring (Clutch lever spring)	011503	Upper hole jewel for pallet
387615	Minute wheel bridge	011503	Lower hole jewel for pallet
388615	Setting lever spring	011147	Upper hole jewel for transmission wheel
☆ 397610	Lever for unlocking stem	011147	Lower hole jewel for transmission wheel
401615	Mainspring with slipping attachment	023150	Tube for pallet cock screw (Cylinder type)
014363	Diashock upper frame	023151	Tube for bridge screw
014364	Diashock lower frame	023170	Tube for pallet cock screw (Recessed type)
014365	Diashock hole jewel with frame	023171	Tube for framework screw of automatic device
011210	Diashock cap jewel		
014317	Diashock spring		
500620	Oscillating weight		
505611	Transmission wheel		
823619	Eccentric post		
831611	Pawl lever with jewel		
839610	Holder for transmission wheel & pawl lever		
☆ 801610	Date dial		
802616	Date driving wheel		

Remarks :

- Lever for unlocking stem**
☆ 397610Used only for the one-piece waterproof case.
- Date dial**
☆ 801610 (Black figures on white background)Used when the crown is located at **4** o'clock and the date frame at **3** o'clock.

If the date dial is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.
- Holding ring for dial**Measure the total thickness and the outside diameter
☆ 8846111.82 mm total thickness and 29.1 φ mm outside diameter

If the holding ring for dial is required in any other type, specify ① Cal. No. and ② the dial No.

see remarks.
t letters are not shown in photos; those parts are interchangeable with the basic calibre
(Cal. No. **6106A** 25J Catalog No. 61-06-1 Green page).