
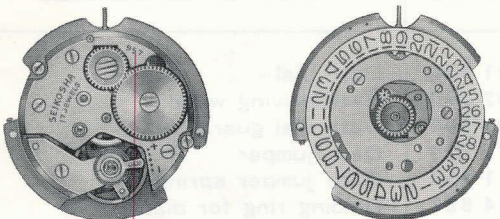


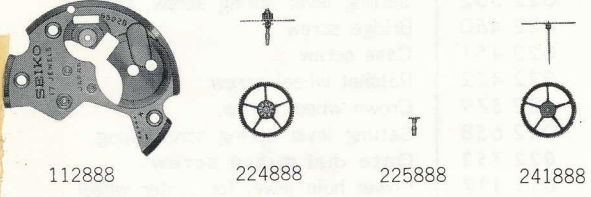

Seiko 6602B Movement Parts (1)

Compiled by EmmyWatch - <https://www.emmywatch.com>

Calibre No. 6602B ⇒ Basic Calibre 66B 17J Catalog No. 66-00-1	Jewels 17j	Style Name
 Cal. 6602B		Characteristics Casing diameter : 27.60 ϕ mm Maximum height : 4.45 mm Vibrations per hour : 18,000 Non-automatic with sweep second Calendar(date) "Diashock" Shock Resistant Device "Diafix" Oil Lubrication Device
 112888 224888 225888 241888 261790 271888 372880 373740  195880 ☆801880 802790 808880 810720 811720 884882		
 022753 $\frac{2}{1}$		

☆⇒ Please see remarks on the reverse page.

As for all other parts not shown here, please refer to the basic calibre (Cal. No. **66B** 17J Catalog No. 66-00-1 Green page).

Calibre No.		Jewels	Style Name
6602B		17j	
⇒ Basic Calibre 66B 17J Catalog No. 66-00-1			
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
112 888	Barrel & train-wheel bridge	☆801 880	Date dial
122 660	Center wheel bridge	802 790	Date driving wheel
161 660	Pallet cock	808 880	Date dial guard
171 660	Balance cock	810 720	Date jumper
195 880	Calendar plate	811 720	Date jumper spring
205 661	Complete barrel with arbor	884 882	Holding ring for dial
213 661	Barrel arbor	022 150	Stud screw
224 888	Center wheel & pinion with cannon pinion	022 253	Dial screw
225 888	Cannon pinion	022 256	Pallet cock screw
231 660	Third wheel & pinion	022 257	Center wheel bridge screw
241 888	Sweep second wheel & pinion	022 257	Calendar plate screw
251 660	Escape wheel & pinion	022 362	Setting lever spring screw, short
261 790	Minute wheel	022 450	Bridge screw
271 888	Hour wheel	022 451	Case screw
281 660	Setting wheel	022 452	Ratchet wheel screw
282 660	Clutch wheel	022 579	Crown wheel screw
283 660	Winding pinion	022 658	Setting lever spring screw, long
284 660	Crown wheel	022 753	Date dial guard screw
285 660	Ratchet wheel	011 117	Lower hole jewel for center wheel
301 660	Jewelled pallet fork & staff	011 405	Upper hole jewel for 3rd wheel
310 660	Balance complete with stud	011 405	Lower hole jewel for 3rd wheel
315 610	Balance staff	011 405	Upper hole jewel for sweep second wheel
331 610	Roller with jewel	011 503	Upper hole jewel for pallet
341 660	Regulator	011 503	Lower hole jewel for pallet
345 660	Stud holder	023 150	Tube for pallet cock screw
351 663	Winding stem	023 151	Tube for bridge screw
372 880	Joint stem (movement portion)	023 151	Tube for calendar plate screw, long
373 740	Joint stem (case portion)	023 153	Tube for setting lever spring screw
381 660	Click	023 155	Tube for calendar plate screw, short
382 660	Click spring		
383 943	Setting lever		
384 943	Yoke (Clutch lever)		
388 943	Setting lever spring		
390 660	Setting lever axle		
401 660	Mainspring (self-greasing)		
446 660	Bearing plate for sweep second wheel		
491 610	Dial washer		
014 223	Diashock upper frame		
014 254	Diashock lower frame		
014 225	Diashock hole jewel with frame		
011 205	Diashock upper cap jewel		
011 210	Diashock lower cap jewel		
014 217	Diashock spring		
015 411	Diafix upper hole jewel with frame for escape wheel		
015 411	Diafix lower hole jewel with frame for escape wheel		
011 206	Diafix cap jewel		
015 113	Diafix spring		

Remarks :

Date dial

☆801 880

Used when both the crown and the date frame are located at 3 o'clock position.

If the date dial is required in any other type, specify

① Cal. No.

② the crown position

③ the date frame position and

④ Case No.