



Seiko 7017A Movement Parts (1)

Compiled by EmmyWatch - <https://www.emmywatch.com>

Calibre No.


7017A

Jewels


21j

Style Name

Basic Calibre 7005A 17J Catalog No. 70-05-1



Cal. 7017A



Characteristics

Casing diameter : 27.00 ϕ mm
 Maximum height : 5.90 mm
 Vibrations per hour : 21,600
 Automatic winding with sweep second
 Chronograph
 Calendar (day & date)
 Instant setting device for day & date calendar
 Bilingual change-over system for day of week
 "Diashock" Shock Resistant Device
 "Diafix" Oil Lubrication Device



☆ 112028



☆ 112052



122005



171033



201046



224009



225005



231014



251016



271007



381006



383005



384007



388005



436001



015541



015551



011221



014417

354022

☆ 357002

☆ 998002

☆ 999002



509007




511005



831002



836003



☆ 801010



802005




808006



719001



720001



720002



868003




☆ 870016



873005



963001



190002



571005



575003



576003



581003



585007



☆ 888001

☆ 888002



☆ 884012

☆ 884016



012277



012281



012354



012423



012424

2/1

☆ ⇨ Please see remarks on the next page.

As for all other parts not shown here, please refer to the basic calibre

(Cal. No. 7005A 17J Catalog No. 70-05-1 Green page).

| Calibre No. | | Jewels | Style Name |
|--|--|--|---|
| 7017A | | 21j | |
| ⇒ Basic Calibre 7005A 17J Catalog No. 70-05-1 | | | |
| PART NO. | LIST OF MATERIALS | PART NO. | LIST OF MATERIALS |
| ☆112028 } ☆112052 } 122005 161004 171033 190002 201046 | Barrel & train-wheel bridge Center wheel bridge Pallet cock Balance cock Chronograph bridge Complete barrel with arbor & mainspring | 963001 571005 575003 576003 581003 585007 | Snap for day star with dial disk Operating lever Operating lever spring Pillar wheel Balance stop lever Hammer |
| 224009 | Center wheel & pinion with cannon pinion | ☆888001 } ☆888002 } | Center chronograph wheel |
| 225005 | Cannon pinion | 012123 | Stud screw |
| 231014 | Third wheel & pinion | 012277 | Lower end-piece screw for 3rd & escape wheel |
| 251016 | Escape wheel & pinion | 012281 | Chronograph bridge screw |
| 261006 | Minute wheel | 012281 | Balance stop lever screw |
| 271007 | Hour wheel | 012354 | Date driving wheel screw |
| 282003 | Clutch wheel | 012354 | Date dial guard screw |
| 285013 | Ratchet wheel | 012354 | Day corrector screw |
| 301009 | Jewelled pallet fork & staff | 012415 | Setting lever spring screw |
| 310020 | Balance complete with stud | 012417 | Pallet cock screw |
| 315008 | Balance staff | 012417 | Operating lever spring screw |
| 331005 | Roller with jewel | 012423 | Bridge screw |
| 341007 | Regulator | 012424 | Center wheel bridge screw |
| 345007 | Stud holder | 012424 | Screw for day corrector spring (B) |
| 354022 } | Winding stem | 012539 | Second reduction wheel screw |
| ☆357002 } | | 012736 | Day jumper screw |
| 381006 | Click | 012919 | Ratchet wheel screw |
| 383005 | Setting lever | 011715 | Upper hole jewel for center wheel |
| 384007 | Yoke (Clutch lever) | 011146 | Lower hole jewel for center wheel |
| 388005 | Setting lever spring | 011651 | Lower hole jewel for 3rd wheel |
| 436001 | Lower end-piece for 3rd & escape wheel | 011611 | Lower hole jewel for escape wheel |
| ☆998002 | Indicator wheel | 011505 | Upper hole jewel for pallet |
| ☆999002 | Indicator wheel spring | 011505 | Lower hole jewel for pallet |
| 014293 | Diashock upper frame | 011162 | Upper hole jewel for 1st reduction wheel |
| 014294 | Diashock lower frame | 011530 | Lower hole jewel for 1st reduction wheel |
| 014295 | Diashock hole jewel with frame | 013011 | Tube for day corrector screw |
| 011220 | Diashock cap jewel | 013019 | Tube for operating lever spring screw |
| 014217 | Diashock spring | 013053 | Tube for barrel & train-wheel bridge screw |
| 015541 | Diafix upper hole jewel with frame for 3rd wheel | 013186 | Tube for pallet cock screw (long) |
| 015551 | Diafix upper hole jewel with frame for escape wheel | 013193 | Tube for 2nd reduction wheel screw |
| 011221 | Diafix cap jewel | 013198 | Tube for pallet cock screw (short) |
| 014417 | Diafix spring | 013199 | Tube for date driving wheel screw |
| 509007 | Oscillating weight with ball-bearing | 013975 | Eccentric dial pin |
| 511005 | First reduction wheel | | |
| 514002 | Second reduction wheel | | |
| 831002 | Pawl lever | | |
| 836003 | First reduction wheel holder | | |
| 556004 | Date finger | | |
| ☆801010 | Date dial | | |
| 802005 | Date driving wheel | | |
| 808006 | Date dial guard | | |
| 810002 | Date jumper | | |
| 817004 | Intermediate date wheel | | |
| 719001 | Day corrector | | |
| 720001 | Day corrector spring (A) | | |
| 720002 | Day corrector spring (B) | | |
| 868003 | Day finger | | |
| ☆870016 | Day star with dial disk | | |
| 873005 | Day jumper | | |
| ☆884012 } | Holding ring for dial | | |
| ☆884016 } | | | |

☆ ⇒ Please see remarks on the next page.

Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre

(Cal. No. 7005A 17J Catalog No. 70-05-1 Green page).

Calibre No.

7017A

Jewels

21j

Style Name

⇒ Basic Calibre 7005A 17J Catalog No. 70-05-1


Remarks :**Barrel & train-wheel bridge and Center chronograph wheel**

The combinations of barrel & train-wheel bridge and center chronograph wheel are as noted hereunder :
Be carefull that the right combination should be chosen at the time of replacing the parts, since the each part No. differs respectively according to each combination.


Barrel & train-wheel bridge ————— Refer to the following diagram.

- ☆ 112028 (holding pin for pawl lever on barrel & train-wheel bridge : white nickel plated)
..... in combination with center chronograph wheel of part No. 888001
- ☆ 112052 (holding pin for pawl lever on barrel & train-wheel bridge : gold plated)
..... in combination with center chronograph wheel of part No. 888002

The barrel & train-wheel bridge (part No. 112052) has the two kinds of marking positions (calibre No., jewels, Japan). But both of them are interchangeable because of only difference of marking positions.

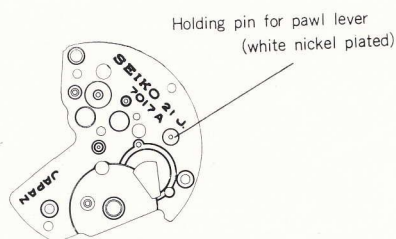


☆ 112028

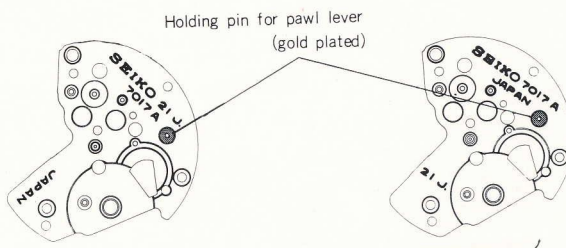


☆ 112052

Center chronograph wheel ————— Refer to the following diagram.

- ☆ 888001 (sweep second wheel without groove) in combination with barrel & train-wheel bridge of part No. 112028
- ☆ 888002 (sweep second wheel with groove) in combination with barrel & train-wheel bridge of part No. 112052

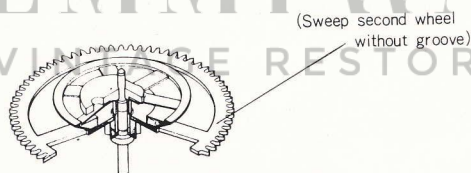

☆ 888001

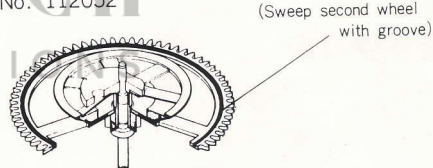

☆ 888002

Winding stem (☆ 357002)

Indicator wheel (☆ 998002)

Indicator wheel spring (☆ 999002)

} Used only for the models with rotating dial ring.

Date dial

- ☆ 801010 (White figures on black background) Used when both the crown and the date frame are located at **3 o'clock**.

If the date dial is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.

Day star with dial disk


- ☆ 870016 (English ↔ Japanese, White figures on black background) Used when both the crown and the day frame are located at **3 o'clock**.

If the day star with dial disk is required in any other type, specify the number printed on the disk.


Holding ring for dial ————— There are two types of holding ring for dial. Select the suitable one by the following procedures after referring to the sectional shapes in the lower diagram.

- ☆ 884012 (Refer to fig. 1) Used only for models with rotating dial ring and the dial of 27.50 ϕ mm external diameter.
- ☆ 884016 (Refer to fig. 2) Used for the screw back or snap back water-resistant case with the dial of 27.50 ϕ mm ~ 28.50 ϕ mm external diameter.

If the parts number of the holding ring for dial is unknown or when ordering a holding ring for dial other than the above-mentioned ones, specify ① Cal. No. ② the dial No. and ③ the case No.



(fig. 1)



(fig. 2)