




## Vacheron Constantin 1005 Movement Parts (1)

*Compiled by EmmyWatch - <https://www.emmywatch.com>*



Calibre avec remontoir dessous.  
Exécution en 17 pierres.  
Hauteur totale 3.60 mm.  
Dimensions encadage :  
L. = 17.40 mm. L. = 6.20 mm.  
Nombre alternances 19800.  
Dimensions ressort barillet :  
L. = 194 mm. H. 1.20 mm. E. = 0.05 mm.

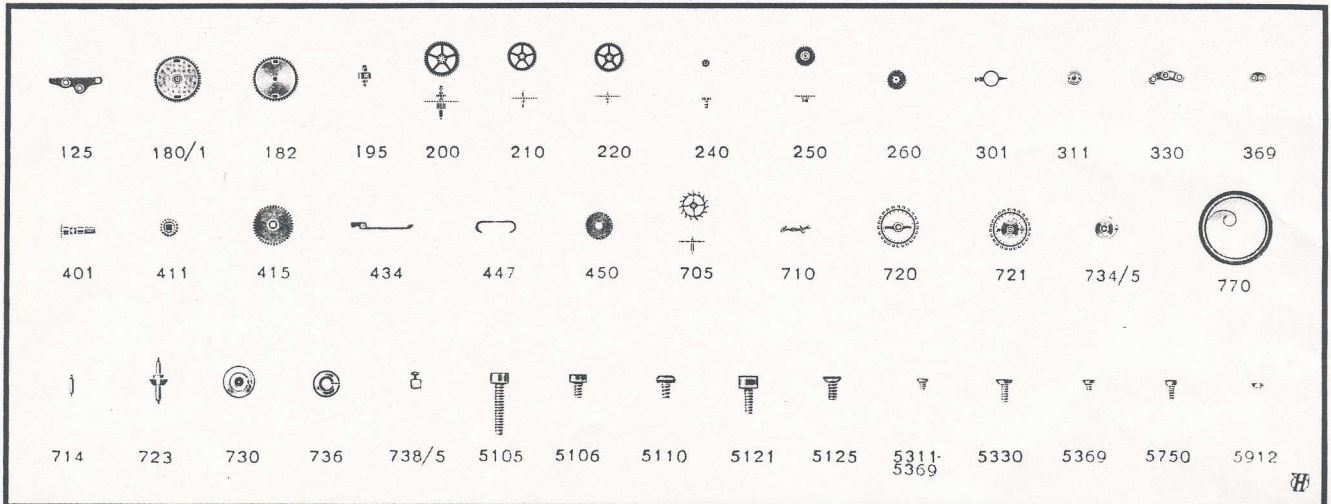

- 125 Pont d'ancre  
180/1 Barillet complet avec ressort  
182 Barillet avec couvercle (sans arbre)  
195 Arbre de barillet  
200 Roue de centre avec chaussée  
210 Roue moyenne  
220 Roue de seconde  
240 Chaussée lanterne (indiquer la hauteur)  
250 Roue des heures (indiquer la hauteur)  
260 Roue de minuterie  
301 Raquette pour spiral plat  
311 Coqueret  
330 Plaque contre-pivot p. balancier  
369 Plaque pignon  
401 Tige de remontoir  
411 Pignon de remontoir avec trou carré  
415 Rochet  
434 Cliquet-ressort  
447 Ressort de tige  
450 Renvoi  
705 Roue d'ancre pivotée  
710 Ancre montée  
714 Tige d'ancre  
720 Balancier pivoté avec plateau (indiquer Ø trou de pierre)  
721 Balancier avec spiral plat (indiquer Ø trou de pierre)  
723 Axe de balancier  
730 Plateau  
734/5 Spiral plat réglé pignon couissant  
736 Virole pour spiral plat  
738/5 Pignon couissant pour spiral plat  
770 Ressort de barillet  
5105 Vis pont de barillet  
5106 Vis 1/4 platine  
5110 Vis pont de rouage  
5121 Vis de coq  
5125 Vis pont d'ancre  
5311-5369 Vis de coqueret  
5330 Vis de plaque contre-pivot  
5369 Vis de plaque de pignon  
5750 Vis de cadran  
5912 Vis de couronne  
601 Pierre de roue de centre dessus  
605 Pierre de roue moyenne dessus  
606-610 Pierre de roue moyenne dessous et roue de seconde dessus et dessous  
615-616 Pierre de roue d'ancre et d'ancre dessous et dessous  
620-621 Pierre de balancier dessus et dessous

- 125 Pallet cock  
180/1 Barrel complete with mainspring  
182 Barrel and cover  
195 Barrel arbor  
200 Center wheel and pinion with cannon pinion  
210 Third wheel and pinion  
220 Fourth wheel and pinion  
240 Cannon pinion with clam notch (mention height)  
250 Hour wheel (mention height)  
260 Minute wheel  
301 Regulator for flat hairspring  
311 Upper cap jewel with end-piece, for balance  
330 Lower cap jewel with end-piece, for balance  
369 Hairspring stud plate  
401 Winding stem (mention Ø of threading)  
411 Winding pinion (square hole)  
415 Ratchet wheel  
434 Clicking spring  
447 Stem spring  
450 Setting wheel  
705 Escape wheel and pinion  
710 Jewelled pallet fork and staff  
714 Pallet staff  
720 Balance with roller, pivoted (mention Ø of jewel hole)  
721 Balance with flat hairspring, regulated (mention Ø of jewel hole)  
723 Balance staff  
730 Roller  
734/5 Flat hairspring, regulated, sliding stud  
736 Collet for flat hairspring  
738/5 Sliding stud for flat hairspring  
770 Mainspring  
5105 Barrel bridge screw  
5106 1/4 plate screw  
5110 Train work bridge screw  
5121 Balance cock screw  
5125 Pallet cock screw  
5311-5369 Upper end-piece screw  
5330 Lower end-piece screw  
5369 Hairspring stud plate screw  
5750 Dial screw  
5912 Winding crown screw  
601 Jewel for center wheel, upper  
605 Jewel for third wheel, upper  
606-610 Jewel for third wheel, lower and fourth wheel, upper and lower  
615-616 Jewel for escape wheel and pallet staff, upper and lower  
620-621 Balance jewel, upper and lower